


Rod ends requiring maintenance, steel-on-steel, female thread

Principal dimensions						Angle of tilt	Basic load ratings		Designation
d	d2 max	B	G 6H	C1 max	h1		dynamic C	static C0	Rod end with right or left-hand th
in						°	lbf		-
0.5906	1.6142	0.4724	M 14	0.4134	2.4016	8	3820	8430	SI 15 ES

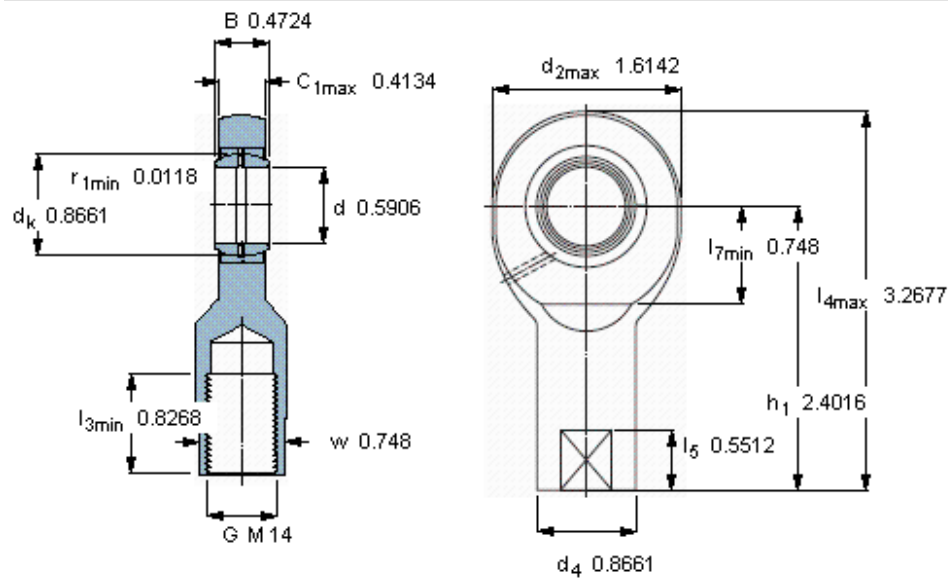

Tolerances

d3 6H
w h14

Specific load factor

K 100

Material constant

KM 330