



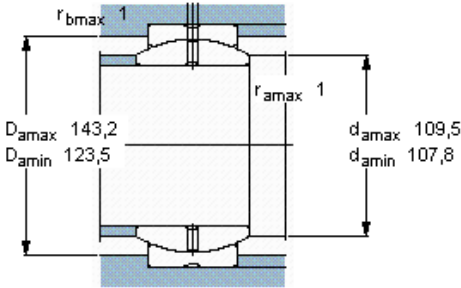

Radial spherical plain bearings requiring maintenance, steel-on-steel

Principal dimensions				Angle of tilt	Basic load ratings		Designation
d	D	B	C		dynamic C	static C0	
mm				°	kN		-
100	150	70	55	7	610	3050	GE 100 ES

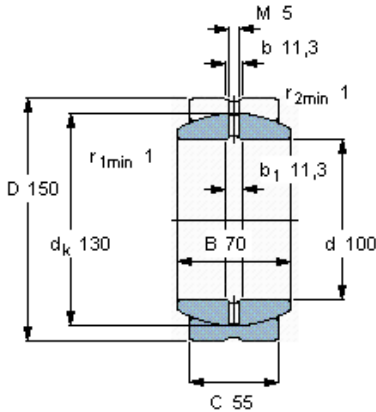

Specific load factor
K 100
Material constant
K_M 330

'Multi-groove' system in outer ring as standard