


# Schäfer + Peters GmbH

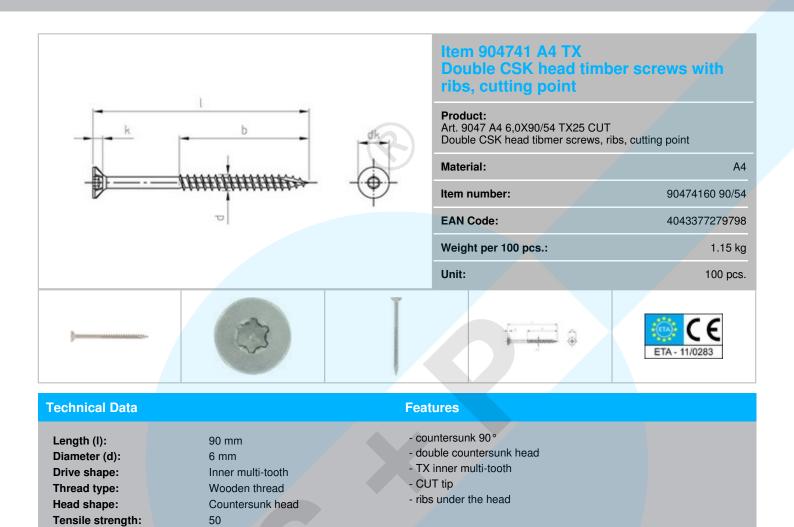

Application Ideal for screwing in wood. The optimal thread geometry ensures the best grip in a variety of wood materials. By recording TX optimum power transmission is achieved.

ETA 11/0283 (Diameter 3,0 and 3,5 not component in the approval)

# **Application Area**

Timber construction



## **Benefits**

#### Wobble-free driving feature

S+P

The TX inner multi-tooth drive allows the screw to be easily and securely screwed in when the screw is attached and countersunk.

### No predrilling

Predrilling is not needed, even in most hardwoods. But given the many different properties of hardwoods we would always recommend testing before use

European technical approval ETA 11/0283 (Diameter 3,0 and 3,5 not component in the approval)