


Principal dimensions				Basic load ratings		Maximum radial loads		Designation
D	d	B	C	dynamic C	static C0	dynamic Fr	static F0r	
mm				kN		kN		-
35	16	52	18	16,8	17,6	8,65	12,2	NUKR 35 A

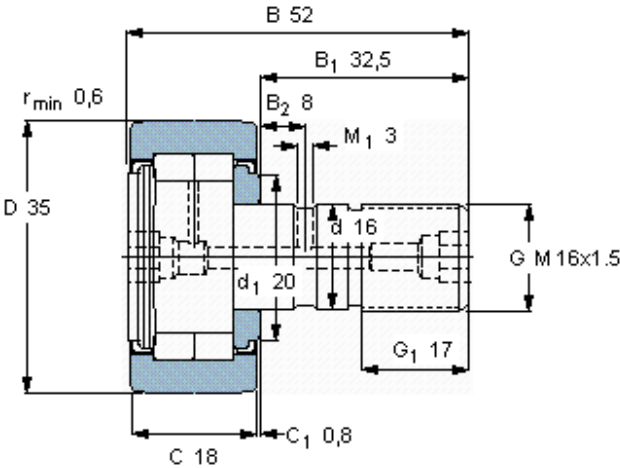

Appertaining grease nipple(s)	NIP A2x7.5
Appertaining hexagonal nut	
Size [mm]	M 16x1.5
Rec. tightening torque [Nm]	58
Internal hexagon in stud	
Key width, mm	8