
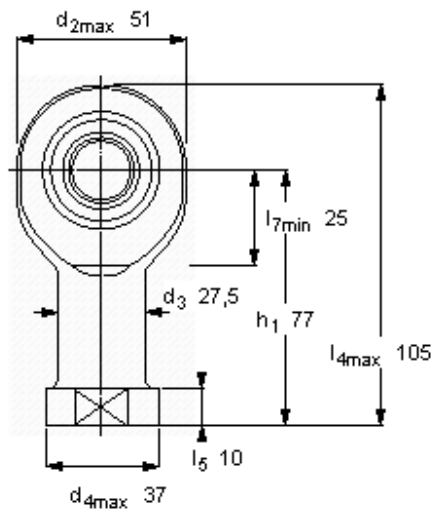


Principal dimensions					Angle of tilt		Basic load ratings		Designation
d	d _{2max}	B	G	C _{1max}	h ₁	±	dynamic C	static C ₀	Rod end with right or left-hand thread
mm						degrees	kN		-
20	51	25	M 20x1.5	18	77	14	31	50	SIKB 20 F

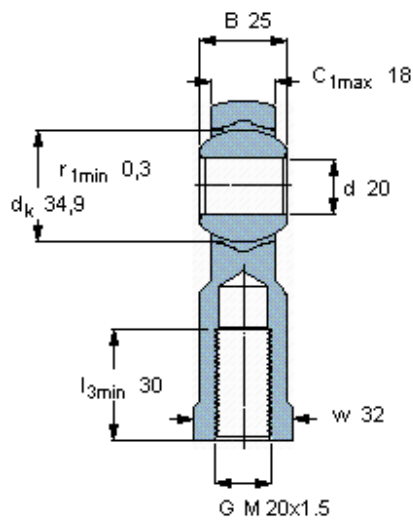

Tolerances

d₃ 6H
w h14

Specific load factor

K 50

Material constant

K_M 530