


Art. 9505 A2/CV 4,5X38 Bi-Metal thin sheet screws, drill cap. 2 mm

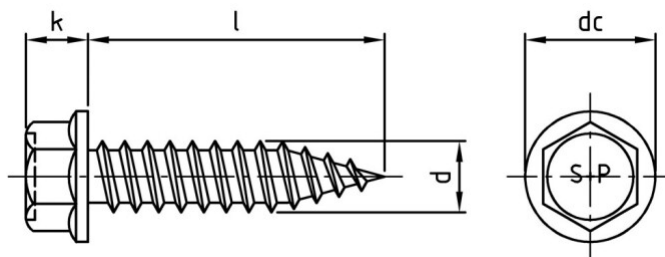

Item number: 95052B2045 38

Materials: Bi-metal A2

Vendor: Schäfer + Peters GmbH

EAN/GTIN: 4043377375032

Net weight per 100 pc.: 0.700 kg

Number per package (VPE): 100 St.

Technical data

Diameter (d): 4,5 mm
Total length (l): 38 mm
Head shape: Hexagonal head
Height of head (k): 4,6 mm
Drive shape (drive): Outer hex
flange diameter (dc): 11 mm
Drive size: SW 8

FEATURES

- 50% higher hold strengt
- 50% of saving of time
- less connection points urgently
- nearly no drilling fillings

Applications

- For thin-profiled panels, butt joints in steel and aluminum profiled sheets and the attachment of the domes on trapezoidal profiles.
- The optimum screw connection of trapezium holders (9032) on trapezium tin boards.
- Bi-Metall - a special welding process joins the stainless steel screw to the hardened carbon steel tip
- Recommended tightening torque for steel: about 3Nm, 1 Nm to 0.8 mm thickness.
- Recommended tightening torque for aluminum: about 1Nm, 0.8 mm thickness under 0.5 Nm.

Area of use

Metal construction, Machine construction, Solar

Product benefits

- Drilling, shaping and joining in one step
- Reduce costs
- No tool changes, no drilling tools